


Features

- Stores up to 16,000 temperature and 16,000 humidity readings
- User selectable sampling rate from 1 sec to 24 hrs
- Visible alarm (LED) if set max/min values are exceeded
- Wall mount bracket and lock for long-term monitoring
- Real-time clock with date and time stamp
- Dual LCD displays current temperature, humidity, min/max and date/time
- Download and analyze data directly to computer via included USB cable
- Includes mounting bracket with screws, USB cable, software, security lock, and battery

TECHNICAL DATA

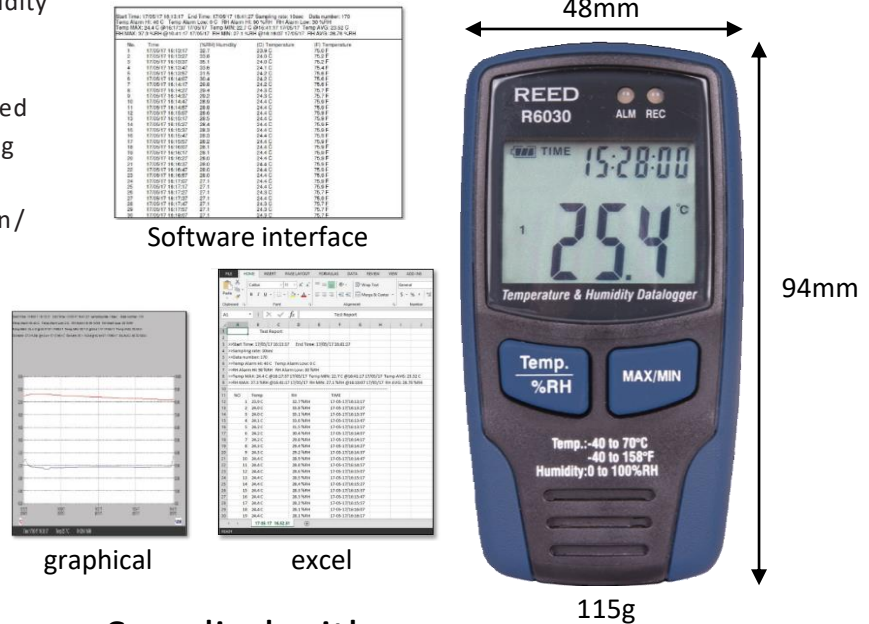

Specifications

Temperature

Measuring Range: -40 to 158°F (-40 to 70°C)
 Accuracy: ±1.8°F (1.0°C)
 Resolution: 0.1°F/°C

Humidity

Measuring Range: 1 to 100% RH
 Accuracy: 0 to 20% & 80 to 100%: ±5%
 20 to 40% & 60 to 80%: ±3.5%
 40 to 60%: ±3%
 Resolution: 0.1% RH

General Specifications

Display: Dual Display, LCD
 Min: Yes
 Max: Yes
 Settable Alarms: Yes (temp. and RH)
 Sampling Rate: Yes (2 secs to 24 hours)
 Internal Memory: 32k readings (16,000 temp. and 16,000 humidity)
 Low Battery Indicator: Yes
 Power Supply: 3.6V battery
 PC Connectivity: Yes (USB)
 Software: Included
 Software OS Compatibility: Windows 7, 8, 10
 Product Certifications: CE
 Operating Temperature: 32 to 122°F (0 to 50°C)
 Storage Temperature: 14 to 140°F (-10 to 60°C)
 Operating Humidity: 0 to 100%
 Dimensions: 3.7 x 1.9 x 1.3"
 (94 x 48 x 33mm)
 Weight: 4.1 oz (115g)

Supplied with:



Distributed by:

MIT Technology Pte Ltd
 31 Woodlands Close, Woodlands
 Horizon, #04-17, Singapore 737855
 Email: sale@mit-tec.com for enquiry!

Model	Description
R6030	Temperature / humidity Datalogger
CA-52A	Soft carrying case
R6030-NIST	Temperature / humidity Datalogger & niST